

SOFTLIGHT 1250



code 420

Specifications

Construction: Pressed aluminium.
Black epoxy anti-scratch finish on outside;
High temperature matt white on inside.
Extra-pure polished aluminum reflector for each lamp;
Diffuser finish.
Lampholder R7s.
Fitting lamps 625w P2/10, 1000w P2/7 and 1250w P2/12 (3200°k)
Rotating lamp bar with tilt lock for a double use for the luminaire as a Soft (indirect) or Broad (direct) light source.
Aluminum yoke with 1-1/8" (29 mm.) spigot M.O. and P.O.
Cable lenght 4m. Section 3x1,5 mm². Titanex
Supplied with integral wire guard for each lamp.
Independent switching for each lamp.
Weight M.O. 4,90 kgs. - P.O. 6,7 kgs.



Accessories

Cod. 421: 1,250 gr. Filter holder


Photometrics

DISTANCE 5 m (2500w - P2/10)	HORIZ. AXIS	VERT. AXIS
light center value	237	237
beam angle= beam at 50% peak value	88°	81°
field angle= beam at 10% peak value	140°	137°


Fitting 1 halogen lamp with R7s base.



Switches panel

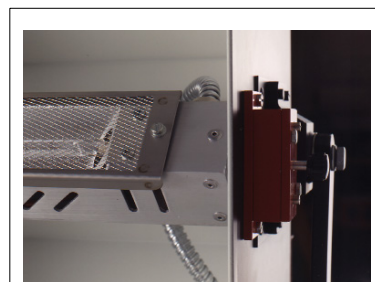

Revolving bar

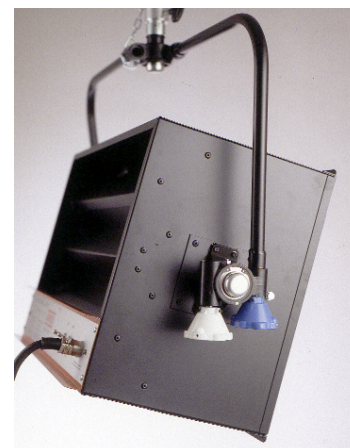

Pole operated