

# SOFTLIGHT 5000

code 400



## Specifications

Construction: Pressed aluminium.  
Black epoxy anti-scratch finish on outside.  
High temperature matt white on inside.  
Extra-pure polished aluminum reflector for each lamp.  
Diffuser finish.  
Lampholder R7s.  
Fitting lamps 625w P2/10, 1000w P2/7 and 1250w P2/12 (3200°k).  
Rotating lamp bar with tilt lock for a double use for the luminaire as a soft (indirect) or Broad (direct) light source.  
Aluminum yoke with 1-1/8" (29 mm.) spigot.  
Cable lenght 4m. Section 3x6 mmq Titanex  
Supplied with integral wire guard for each lamp.  
Independent switching for each lamp.  
Weight M.O. 11,4 kgs. P.O. 14,3 kgs



## Accessories

Cod. 401: 1,250 gr. Filter holder


## Photometrics

DISTANCE 5 m (2500w - P2/10)	HORIZ. AXIS	VERT. AXIS
light center value	660	660
beam angle= beam at 50% peak value	104°	107°
field angle= beam at 10% peak value	152°	170°


Fitting 4 halogen lamp with R7s base.



Switches panel  
(Independent switching for each lamp.)

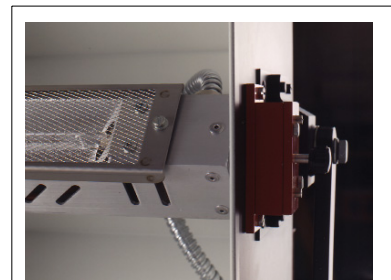

Revolving bar

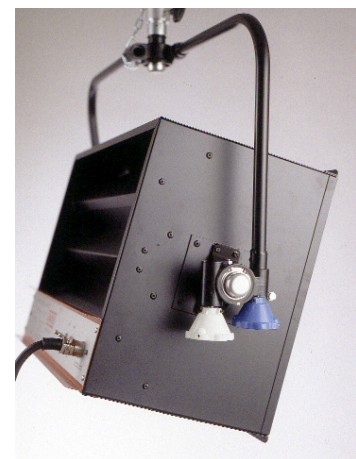

Pole operated